



# Infire Easy 670



BODART & GONAY  
SINCE 1957

## INFIRE EASY 670

<b>Puissance - vermogen - capacity</b>		kW	5-9	CE	A+
<b>Dimensions - afmetingen - dimensions</b>		mm	661x566x451		
<b>Vision du feu - reëel zicht op vuur - real view of fire</b>		mm	L584xH387		
<b>Homologations - goedkeuring - homologation</b>	Phase III KB 12/10/10 (Belgique) - Flamme verte 7*/ Groene Vlam Indice environnemental/milieu index : 0,4-0,5(France) EN132229 (standard Européen)				


## Option - Opties - option

<b>Intérieur - binnenbekleding - interior</b>	Skamolex	√
	4 mm	√
<b>Cadre - kader - frame</b>	30 mm- 3 côtés- 3 zijdig- 3 sides	√
	30 mm- 4 côtés- 4 zijdig - 4 sides	√


€ = payant - betalend - paid / √ = inclus - inbegrepen - included



**BOTTOM**

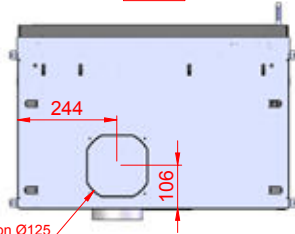


Other possible air inlet connection Ø125

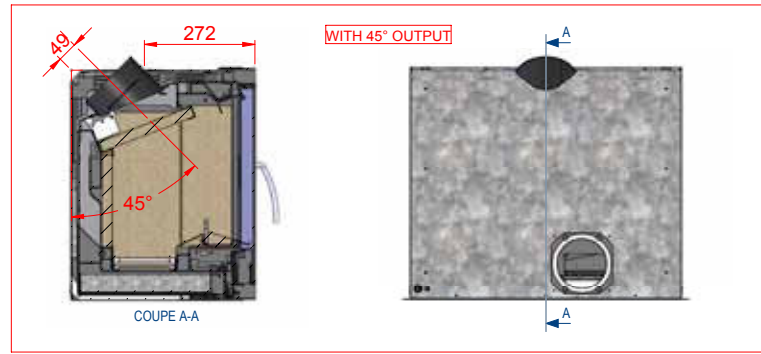


**WITH 45° OUTPUT**

**LEFT SIDE**

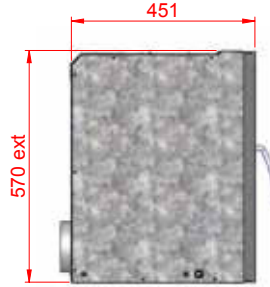

**REAR**

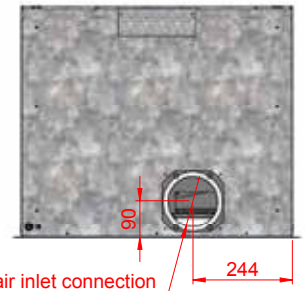


Ø 124 for Ø125 air inlet connection


**RIGHT SIDE**



**FRONT**

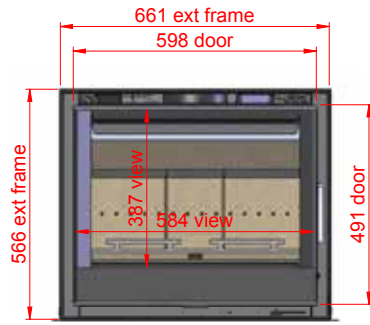

**TOP**

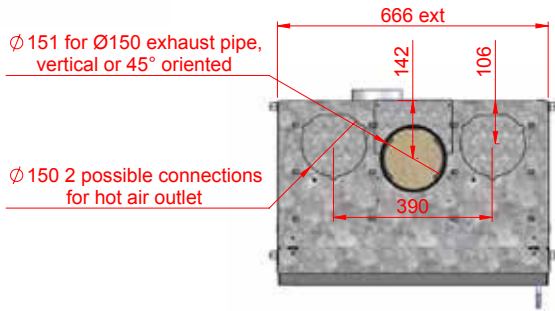

Ø 151 for Ø150 exhaust pipe, vertical or 45° oriented

Ø 150 2 possible connections for hot air outlet



**NOTES :**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....